Model Shown: FB 1250 RP FT


Remote Panel

Remote Panel Model Application:

For installation on any normal pitched shingled roof, where south or west exposure is not available.

Available Remote Panel Models:

SunRise 1250 FT - 30 Watt - For areas up to 2000 sq. ft. SunRise 1650 FT - 45 Watt - For areas up to 2800 sq. ft.

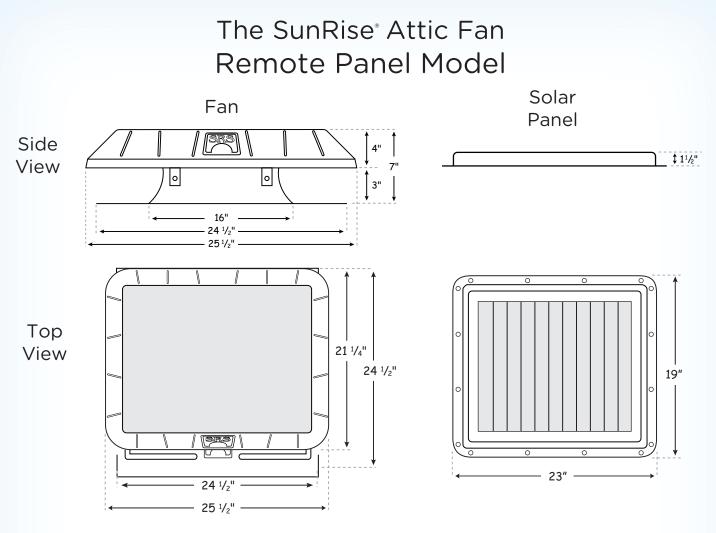

Features:

Solar Panel:	Impact resistant crystalline with tempered glass surface in self-flashing composite mounting tray
Motor:	Ultra quiet, brushless DC motor
Wire:	18/2 red/black
Fan Blade:	12" diameter, 5-blade poly-carbon, computer balanced hub
Hardware:	ALL stainless steel fasteners, including welded stainless steel screen
Top and Base:	UV-Stabilized ABS composite (paintable)
Airflow:	The more intense the sun shines, the faster the SunRise runs
Panel Dimensions:	Height 1.5", Top 24" x 23"
Thermostat:	Turns fan on at 80° and off at 65° during daylight hours

Warranty: 25 Year Limited Warranty

Available Models: FB 1250 RP FT FB 1650 RP FT⁺ † 1650 model has aluminum framed solar panel

Package Size: 27.25" x 25.5" x 11.25" wide.

Fan Dimensions: Height 7", Top 24" x 24"

Base Size: 24.5" x 24.5".

Unit Weight: 20 lbs.

Shipping Weight: 22 lbs.

and (4) aluminum "L" brackets for mounting the panel to the roof

www.sunrisesolar.com