


## Tilt Panel Model Application:

Panel can be tilted to maximize sun exposure. Panel tilts from  $0^{\circ}$  to  $60^{\circ}$  in  $5^{\circ}$  increments Also available in curb base

## Available Tilt Panel Models:

SunRise 1650 FT - 45 Watt - For areas up to 2800 sq. ft.

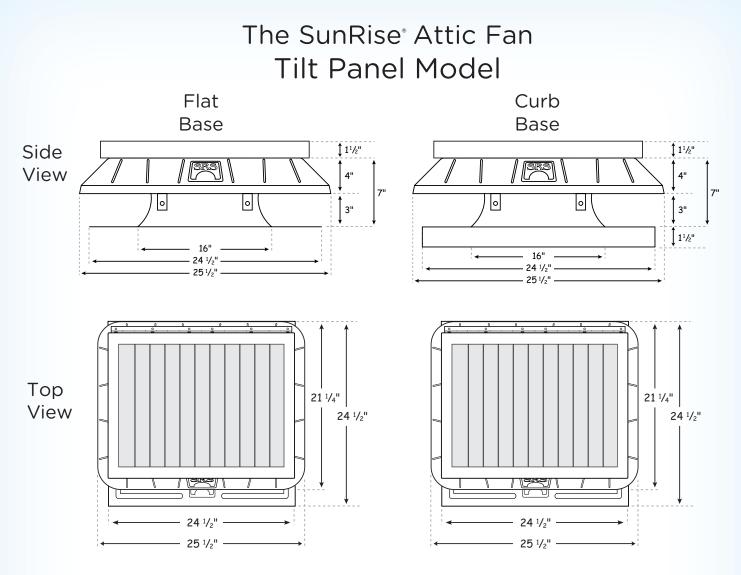

## Features:

| Solar Panel:  | Impact resistant crystalline with tempered<br>glass surface and black anadoized<br>aluminimum frame. Can be tilted from<br>0 <sup>0</sup> to 60 <sup>0</sup> in 5 <sup>0</sup> increments | Unit Dimensions:  | Height 8.5", Top 25.5" x 21.25" |
|---------------|---|-------------------|---------------------------------|
|               |   | Base Size:        | 24.5" x 24.5".                  |
|               |   | Unit Weight:      | 23 lbs.                         |
| Motor:        | Ultra quiet, brushless DC motor   | Shipping Weight:  | 25 lbs.                         |
| Wire:         | 18/2 red/black  | Package Size:     | 27.25" x 25.5" x 11.25" wide.   |
| Fan Blade:    | 12" diameter, 5-blade poly-carbon,<br>computer balanced hub   | Available Models: | FB 1650 TLT FT                  |
| Hardware:     | ALL stainless steel fasteners, including welded stainless steel screen  |                   | CB 1650 TLT FT                  |
| Top and Base: | UV-Stabilized ABS composite (paintable)   |                   |                                 |
| Airflow:      | The more intense the sun shines,<br>the faster the SunRise runs   |                   |                                 |
| Thermostat:   | Turns fan on at 80° and off at 65°<br>during daylight hours   |                   |                                 |

Warranty: 25 Year Limited Warranty

www.sunrisesolar.com